



PLEASE READ CAREFULLY

IMPORTANT NOTE:

Water Supply Regulations do not permit the installation of cisterns with a flushing capacity greater than 6 litres, unless they are used to replace existing 7.5 litre and 9 litre cisterns. For new installations and where pan and cistern are replaced at the same time, the new WC suite must operate at 6 litre maximum flushing volume.

INSTRUCTIONS - Before fitting siphon

This cistern is pre-set to flush 6 litre max. To convert to a larger volume flush, screw the plug provided into the hole located in the side of the siphon bell. Take care not to overtighten the plug. Once fitted install siphon and other parts into the cistern

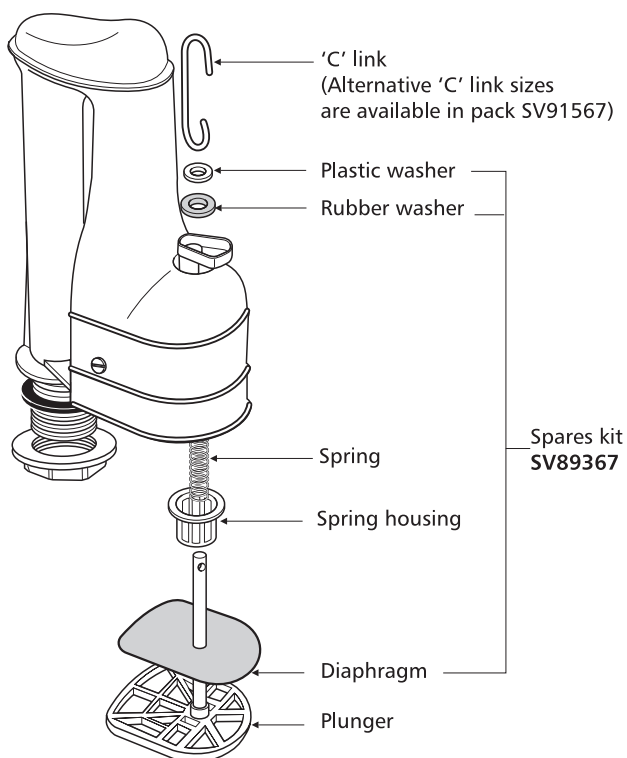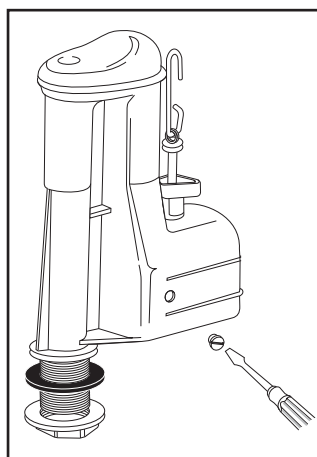

CUSTOMER CARE LINE

01482 496318

FAX LINE 01482 499611

email: customercare@idealstandard.com

.....
We pursue a policy of continuing improvement in design and performance of our products.

The right is, therefore, reserved to vary specifications without notice.

Ideal Standard (UK) Ltd.

4418 02/22