


INSTALLATION

Installation - Installazione - Installation - Montage Instalación - Montering - Монтаж - Montáž
Paigaldamine - Εγκατάσταση - Beszerelés - Montavimas Montáža - Instalare - Инсталлация -
Montaž - Установка - Montaža - Montáž - Montaj - Инсталация



FRONT OPERATING CISTERN LEVER

Insert the lever with threaded sleeve and plated shaped washer, into the hole in the cistern. Place the internal shaped washer onto the threaded sleeve, fit the backnut but do not fully tighten. Connect the operating lifter arm to the 'C' link. Slide the lifter arm onto the spindle. Observe the resting lever angle is correct. Adjust the position of the arm so it is clear from the top of the syphon when the lever assembly is operated. Tighten the lifter arm set screw. Adjust the shaped washer for correct fit and tighten the backnut.

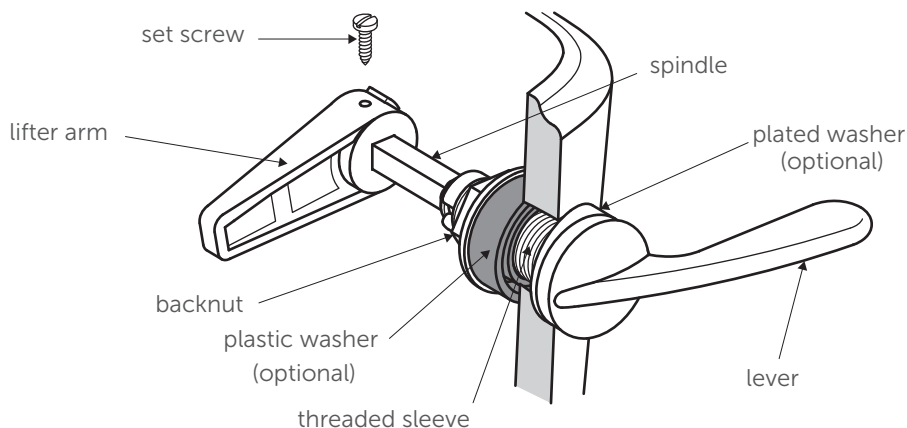

All cistern components must be installed in accordance with UK water regulations.
If in doubt a suitably qualified professional should be consulted.

CUSTOMER CARE HELPLINE

01482 496 318

FAX LINE 01482 499 611
email: customerccare@idealstandard.com

EEM34**4806**67
ver. 1.0/10.22